


Cylinder 5 stage front end with plain eye

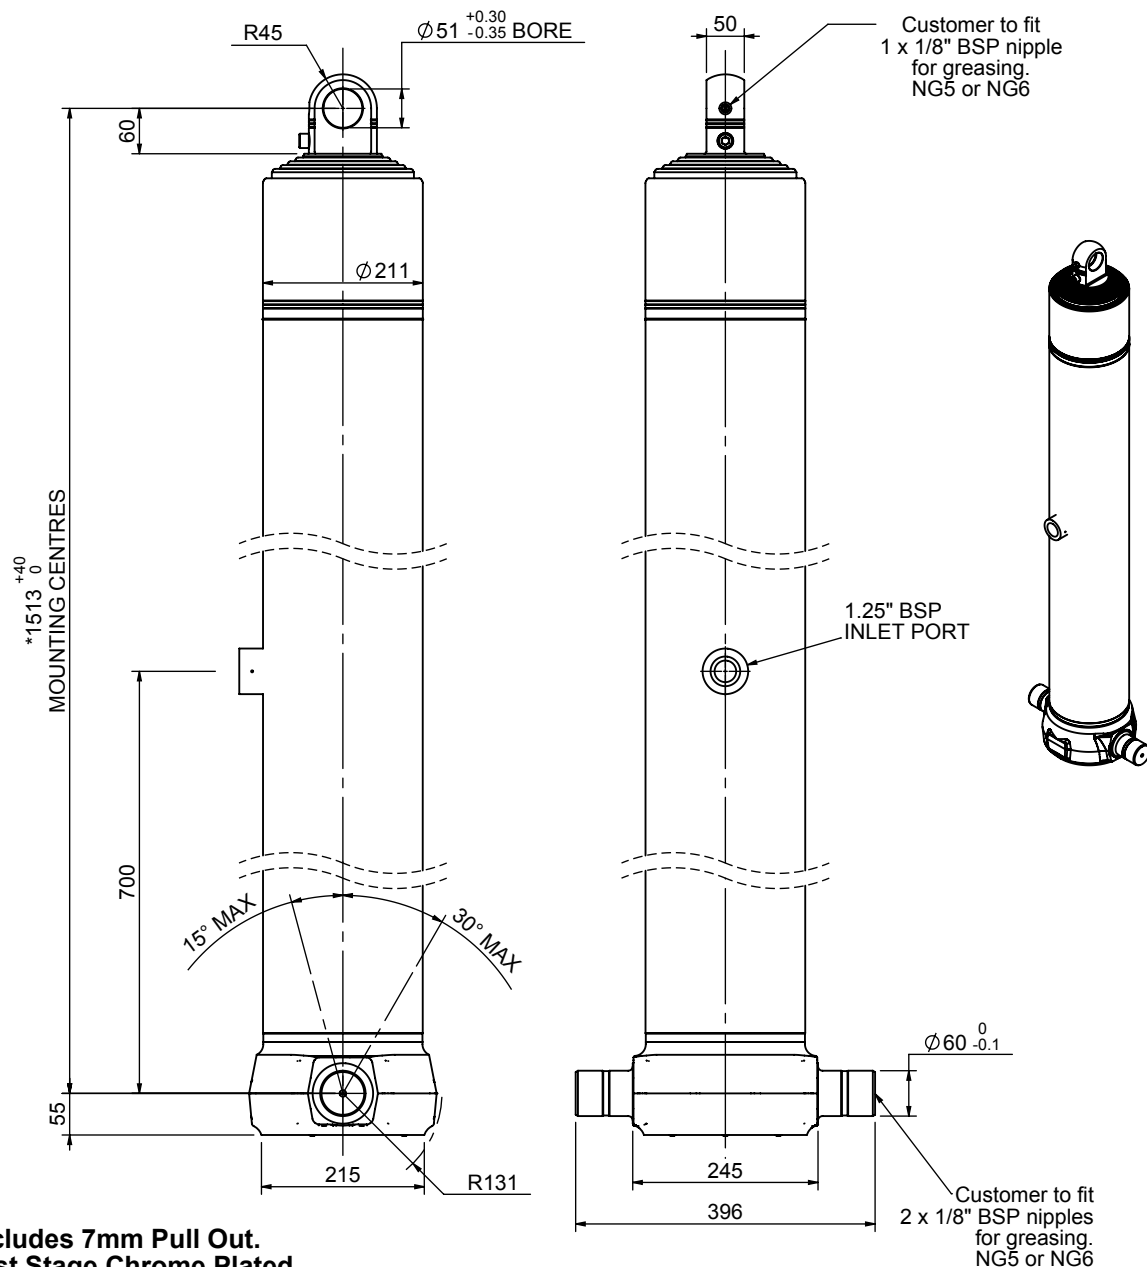

*Includes 7mm Pull Out.
Last Stage Chrome Plated


CS18LE56233B70A02

SPECIFICATION

TIPPING CAPACITY : 32-43 TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
0	211	1475	-	-
1	188	1440	1220	34
2	167	1440	1237	27
3	147	1440	1247	21
4	127	1440	1262	16
5	105	1440	1267	11
Total (+5/-10)			6233	109
Final stroke reduced by	0	Priming Volume		20.3
Cylinder Mass (Kg)	241	Total Volume (Litres)		129.3
Maximum Pressure (Bar)	190	Max. first stage thrust		200 KN

***TIPPING CAPACITY AT WORKING PRESSURE



BODY LENGTH (BL)						OH
8000		8500		9000		
35	48°	33	45°	32	42°	150
39	50°	36	46°	34	43°	450
43	52°	39	48°	37	45°	750

$d = 0$; $r = 900$; Working Pressure 150 bar


For guidance only;

Higher working pressures and tipping capacities may be possible.

To check your application email - applications@edbro.co.uk

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer paint to RAL5013
3. Refer to www.edbro.com for;-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of tipping capacity

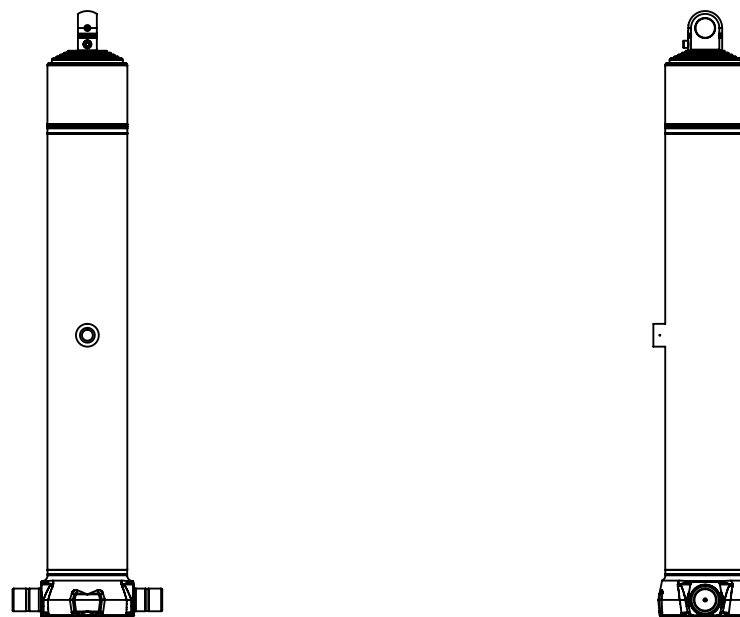

CS18LE56233B70A02