# CHOOSING THE RIGHT FLOOR



KEITH® WALKING FLOOR® systems are available in a wide range of profiles and thicknesses to address the vast number of applications that are in use worldwide. A general description of uses, applications, and benefits to each system is below.

- Full length hold-down
- Full length bearing strip
- Leak resistant
- No floor seal
- Used for MSW, biomass, light to moderate C&D
- Available in thicknesses ranging from 4.5 mm to 12.7 mm triple ridge

(Note: Steel overlay needed when hauling highly abrasive materials.)





- Heavy abrasion applications (Steel Slat only)
- Full length bearing strip
- Leak resistant
- No floor seal
- Impact resistant

- Aluminum V-9 Slat typically used for MSW, recyclables, and light C&D
- Steel V-9 Slat designed for use in heavy C&D, scrap metal, aggregate, and asphalt

### 97mm STANDARD/IMPACT™

- Original WALKING FLOOR® slat profile
- Wide range of profile types
- Interchangeable slat designs
- Used for shredded paper, MSW,
   recyclables, biofuels, and light to
   moderate C&D, wood forest products
- Available in thicknesses ranging from 5 mm to 19 mm triple ridge








2250

2256

2344

### **LEAKPROOF (LPIII)**




- Designed for high moisture loads.
- Can hold over 30 cm of standing water
- Front mount drive
- Full length bearing strip
- Full length hold-down

 Used for MSW, medical waste and silage



## MOBILE APPLICATIONS - EUROPE COMMON FLOORING AND COMPONENTS

Other profiles available on request.

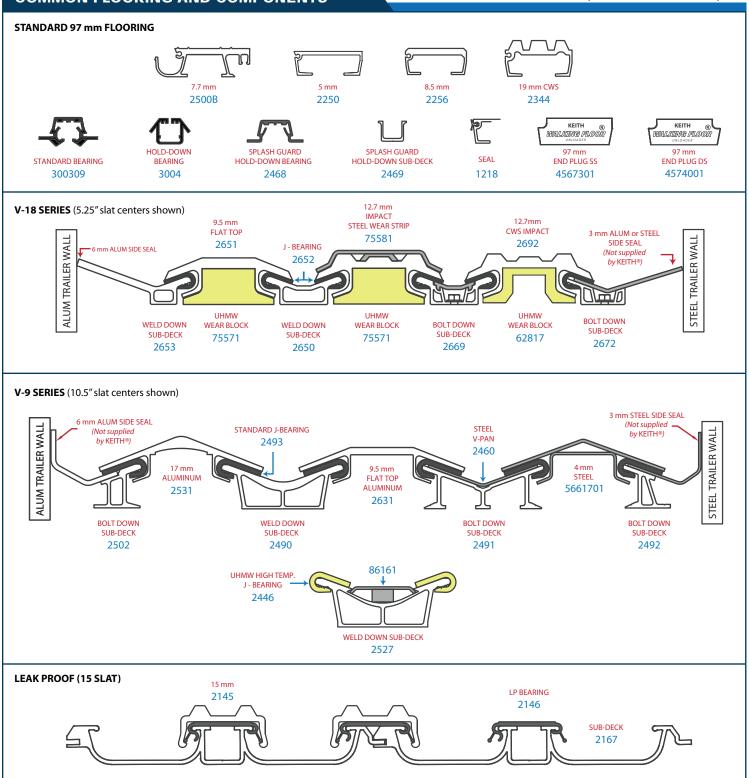

ALL COMPONENTS ALUMINUM UNLESS OTHERWISE NOTED - COMPONENTS NOT SHOWN TO SCALE - (Revised 1.12.16)



#### www.keithwalkingfloor.com

**KEITH WALKING FLOOR Europe** Netherlands

(+31) 342 422007 (+31) 342 422180 fax eurosales@keithwalkingfloor.com KEITH Mfg. Co.
WORLD HEADQUARTERS

(800) 547-6161 (541) 475-3802 (541) 475-2169 fax sales@keithwalkingfloor.com